



Sanjkrupa
auto pack

SURVEY NO. 136/1, PLOT NO.5/1, LEADING INDUSTRIAL ZONE,
GADHAKA ROAD, BHAVNAGAR HIGHWAY, KASTURBADHAM TRAMBA,
RAJKOT - 360020

+91 81414 12336
+91 99791 45163


www.Sanjkrupaautopack.com

Info@sanjkrupaautopack.com

SPECIFICATION SHEET

(ON LINE COATED BOARD) M/C Deckle - 365 - 370 csm

Evonic Creama 180 to 500 GSM

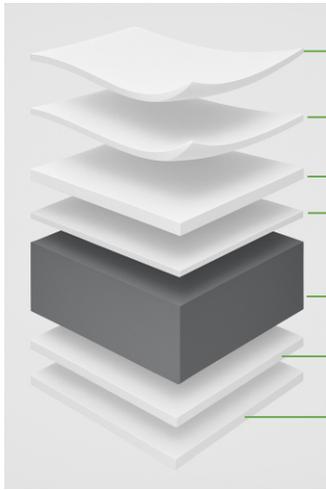

- Top coating with blade (10 ± 1 gm/m²)
- Pre coating (12 ± 1 gm/m²)
- Top liner (Recycled white pulp)
- Under liner (Recycled white pulp)
- Fillers (Recycled grey pulp)
- Back liner (Recycled Grey pulp)
- Bottom coating (Starch - 1 gm/m²)

Application

1. Pacaging Board
2. High Speed Printing Job

Recommended for Multi-colour printing

1. Letter press
2. Offset
3. Rotogravure

Substance gm/m ²	Stiffness (Taber)			Caliper Micron	Bulk cc/gm.	Parameters		
	T 489 om-99					Roughness PPS T 555 om - 99	Microns	2.0±0.5
MD	CD	GM	Brightness T 452 om - 98	%	78±1			
180	22	10	15	220	1.22	Gloss at 75 T 480 om - 99	%	45±3
200	35	16	24	250	1.25			
230	54	24	36	288	1.25	Plabond (scott) Tappi : T - 833	Jules	>100
250	70	32	47	315	1.26			
260	76	34	51	328	1.26	IGT Dry Pick ISO 3782	(m/sec)	>1.0
285	100	42	65	359	1.26			
295/300	125	54	82	366	1.26	COBB Top Bottom T 441 om - 98	g/m ²	35-50 50-100
320	150	62	96	410	1.28			
330	160	67	104	422	1.28	Smoothness-Bendtsen ISO-8791-2	ml/min	50-70
350	190	82	125	448	1.28			
360	200	86	131	468	1.30	Burst Factor Tappi T807	-	16±2
400	260	113	171	528	1.32			
420	280	121	184	554	1.32	Moisture Contenet Tappi T412 om 02	%	7.5%±1.0%
450	340	147	224	594	1.32			
500	360	165	244	660	1.32	Tolerance		
±3%	±10%			±5%	±5%			