




SPECIFICATION SHEET

Evonic Kraft back

250 to 500 GSM

(ON LINE COATED BOARD) M/C Deckle-365-370cms

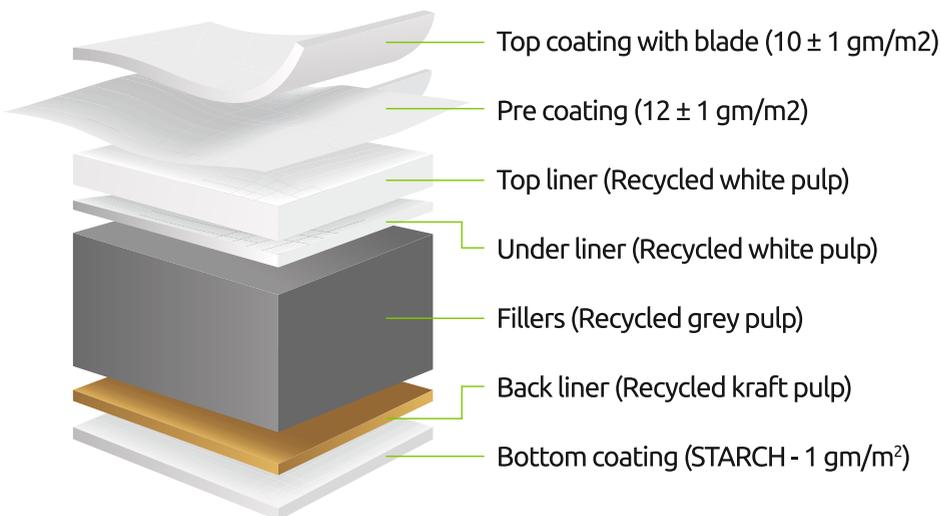

Application

1. Packaging board
2. High speed printing job

Recommended for Multi-color printing

1. Letter press
2. Offset
3. Rotogravure

Substance	Stiffness (Taber)			Caliper	Bulk	Parameters		
gm/m ²	T 489 om-99			Micron	cc/gm.	Roughness - PPS T 555 om - 99	Microns	2.5±0.5
	MD	CD	GM					
250	70	32	47	310	1.24	Brightness Top T 452 om - 98	%	76±1
300	125	54	82	366	1.25			
320	150	62	96	400	1.25	Gloss at 75 T 480 om - 99	%	40±3
330	160	67	104	416	1.26			
350	190	82	125	445	1.27	Plybond (scott) Tappi : T-833	Jules	>130
360	200	86	131	457	1.27			
400	260	113	171	520	1.30	IGT Dry Pick ISO 3782	(m/sec)	>1.0
420	280	121	184	546	1.30			
450	340	147	224	585	1.30	COBB Top Bottom T 441 om - 98	g/m ²	35-50 50-100
500	360	165	244	650	1.30			
						Smoothness-Bendtsen ISO-8791-2	ml/min	50-80
						Burst Factor Tappi T807	-	16±2
Tolerance						Moisture Content Tappi T412 om 02	%	7.5%±1.0%
±3%	±10%			±5%	±5%			